

8000mAh Dual USB 2.1A Power Bank with 32 LED Lantern

Quick Start Guide



model APBQ08F

aluratek.com

qsg Q10449 Copyright © 2017 Aluratek, Inc. All Rights Reserved.

Operation

Charging The Battery

The battery is not fully charged and it is highly recommended that you charge APBQ08F before you begin using it.

Note: Using APBQ08F "out of the box" will not harm the device. You will experience reduced battery life as the unit will not be fully charged.

To charge the device, connect the larger end of the USB cable provided to your PC or a USB power adapter (not provided) and the Micro USB end to APBQ08F. Once it is fully charged, all 4 blue LEDs will be on. The charge time is about 5 hours.

Radio and TV Interference Statement

WARNING!!! This equipment has been tested and found to comply with the limits of a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by whatever measures may be required to correct the interference.

Package Contents

Your order has been carefully packaged and inspected. The following accessories should be included in your package. Please inspect the contents of the package to ensure that you have received all items and that nothing has been damaged. If you discover a problem, please contact us immediately for assistance.



USB Charging Cable



Carabiner



Registration Card

Operation

Checking The Capacity

The power status LEDs will light up according to available power capacity



Note: LED indicators will remain on and stop flashing when the power bank is fully charged. When the battery is low, the first indicator will start to flash. Please charge the power bank. The power bank will shut off in 30 seconds when no device is connected.

Charging Your Device

Use the original cable that came with your device. Connect the USB-A end to one of the USB Output ports on the battery pack. Charging will start automatically once the cable is connected.

Warranty

Aluratek warrants this product against defect in material or workmanship for **1 YEAR** from the date of purchase.

This warranty becomes invalid if the factory-supplied serial number or "warranty void" sticker has been removed or altered on the product.


This warranty does not cover:

- A) Cosmetic damage or damage due to acts of God
- B) Accident, misuse, abuse, negligence or modification of any part of the product.
- C) Damage due to improper operation or maintenance, connection to improper equipment, or attempted repair by anyone other than Aluratek.
- D) Products sold AS IS or WITH FAULTS.

IN NO EVENT SHALL ALURATEK'S LIABILITY EXCEED THE PRICE PAID FOR THE PRODUCT FROM DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THE PRODUCT, IT'S ACCOMPANYING SOFTWARE, OR IT'S DOCUMENTATION.

Aluratek makes no warranty or representation, expressed, implied, or statutory, with respect to it's products, contents or use of this documentation and all accompanying software, and specifically disclaims it's quality, performance, merchantability, or fitness for any particular purpose. Aluratek reserves the right to revise or update it's product, software or documentation without obligation to notify any individual or entity.

Product Highlights

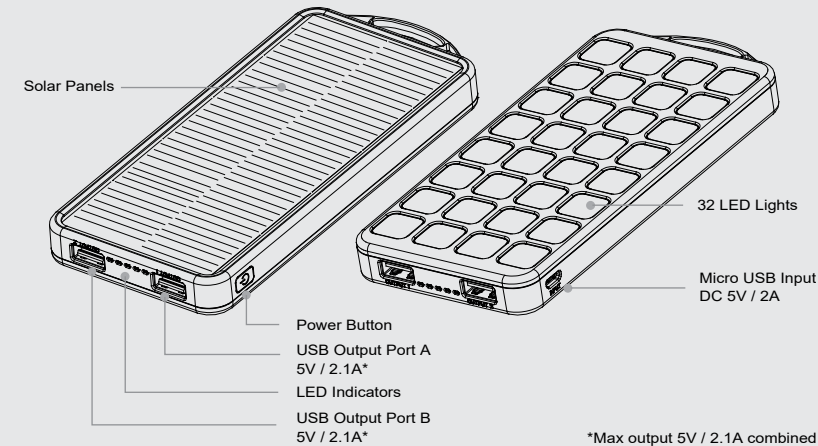

Operation

Solar Panel Charging

Place the solar panel side directly under the sun to start charge, the green LED indicator will turn on indicating charging.

Note: The solar panel is designed for emergency charging. It should not be the primary source of charging. Prolonged exposure under the sun will cause damage to the internal battery.

Operating The LED Lamp

- To turn ON, press the Power Button once for 100% brightness
- Once ON at 100%, press the Power Button once for 25% brightness
- Once ON at 25%, press the Power Button once for strobe light
- Press the power button once to turn the lamp OFF

Note: The LED lamp will last up to 50 hours with 25% brightness when the battery charger is fully charged.

Technical Support

If you need further assistance, please contact the Aluratek support department for troubleshooting prior to returning this device.

E-mail: support@aluratek.com

Web: www.aluratek.com/helpdesk

Local (Irvine, CA): 714-586-8730

Toll free: 1-866-580-1978